
**A 3G DESIGN FOR THE AUTOMATED TELLER MACHINE
OPERATIONS USING USIM**

K.MANOHAR*

S.IRFAN*

ABSTRACT

Automated teller machines (ATMs) are well known devices typically used by individuals to carry out a variety of personal and business financial transactions and/or banking functions. ATMs have become very popular with the general public for their availability and general user friendliness.

Existing ATMs are convenient and easy to use for most consumers. Existing ATMs typically provide instructions on an ATM display screen that are read by a user to provide for interactive operation of the ATM. Having read the display screen instructions, a user is able to use and operate the ATM via data and information entered on a keypad.

However the drawback in the existing system is that the user should carry their ATM card without fail. But in many cases we forget it. So only we designed a system which helps us to use the ATM machine without the ATM card.

In this proposed system we have created the new generation ATM machine which can be operator without the ATM card. By using this system ATM machine can be operator by using our SIM in the mobile phone. When we insert our SIM in the reader unit of the ATM machine it transfers the mobile to the server. In server we can collect the related information of the mobile number (i.e) the users account details, their photo etc. the camera presented near the ATM machine will capture the users image and compare it with the user image in the server using MATLAB. Only when the image matches it asks the pin number and further processing starts.

Otherwise the process is terminated. So by using this system need of ATM card is completely eliminated we can operate the ATM machine by using our SIM itself.

By using this system malfunctions can be avoided. Our transaction will be much secured. One more application can also be added in this system for helping the blind people. In the existing system all the transactions are done through keyboard only.

It may be difficult for blind people so we can also add voice enunciator to indicate each and every process to the blind people. It that enables a visually and/or hearing impaired individual to conveniently and easily carry out financial transactions or banking functions.

*Lecturer, Electrical Engineering Dept., Wollo University

INTRODUCTION

3G is an **International Telecommunication Union (ITU) standard** for third generation mobile telephone systems under the International Mobile Telecommunications programmed, IMT-2000. Analog cellular was the first generation, digital PCS was the second.

Along with 3G was the big rage in the late 90's, with proponents announcing that it was the Killer Wireless Application because of its ability to simultaneously transfer voice data (the phone call) and other non-voice data such as music, photographs, video, email, instant messaging, and information downloads.


3G networks use a variety of wireless network technologies, including GSM, CDMA, TDMA, WCDMA, CDMA2000, UMTS and EDGE, and this leads to some confusion as well as a great deal of flexibility.

3G implementation was slower than initially anticipated, however, because of the cost of upgrading equipment and licensing fees for additional spectrum. The earlier, 2G networks didn't typically use the same frequencies as 3G (except in the United States), and licensing fees, particularly in Europe, were extremely expensive.


Only Japan and South Korea were able to implement this technology quickly, largely because of the high level of government support for new infrastructure advances. In Japan, by the end of 2006 the majority of customers was on 3G and upgrades to the next stage, 3.5G (with 3 Mbit/s data rates), was underway. Implementation in the rest of the world is coming along, but at a slightly slower pace.

In December 2007, 190 3G networks were operating in 40 countries, with 200 million subscribers -- but that's still only around 7% of the 3 billion mobile phone subscriptions worldwide.

You may also see terms like 2.5G (almost there!), 3.5G (moving forward) and 4G (the step beyond). In fact, you may see some people saying they have already existing 4G systems. However, the 4G standard has not yet been finalized, and the "existing 4G" systems are simply prototypes of technologies which may or may not become part of an eventual 4G standard. As the deployment of 4G, like 3G and 2G, will involve the complete replacement of existing handsets and networks, mobile experts are not predicting deployment until the 2012-

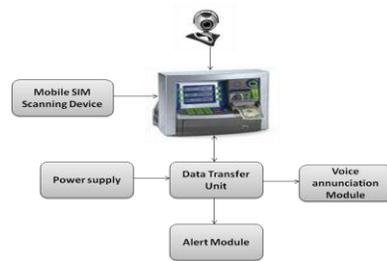

BLOCKDIAGRAM

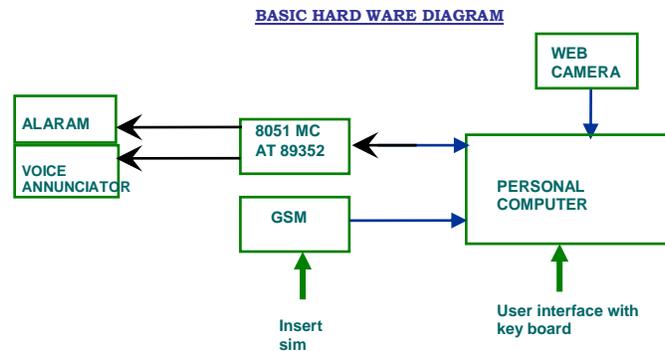

II.BLOCK DIAGRAM DESCRIPTION:

Mobile scanning device scans SIM number through GSM Modem Collected data is given to the Automated teller machines (ATMs) for further processing.

At the same time, web camera captures the images and compares using digital signal processing with the image stored In the data base.Each processing information produces by voice annunciation module.

Power supply unit consists of a step down transformer along with rectifier unit to convert 230 V AC into required 7 V DC. 7 V DC supply is given to the micro controller for its action.

It may be difficult for blind people to use existing ATM so we can add voice annunciator to indicate each and every process to the blind people. It enables a visually and/or hearing impaired individual to conveniently and easily carry out financial transactions or banking functions. Each processing information produces by voice annunciation module.

If images and PIN number are same then further processing is continued,Otherwise it gives alarm through Alert module.

Data trasfer unit consist of a micro controller of no AT89352 which transfers the data between alert module, voice annunciation module & ATM machine.

Automated teller machines (ATMs) are well known devices typically used by individuals to carry out a variety of personal and business financial transactions and/or banking functions.

ATMs have become very popular with the general public for their availability and general user friendliness.

ATMs are now found in many locations having a regular or high volume of consumer traffic. For example, ATMs are typically found in restaurants, supermarkets, Convenience stores, malls, schools, gas stations, hotels, work locations, banking centers, airports, entertainment establishments, transportation facilities and a myriad of other locations.

ATMs are typically available to consumers on a continuous basis such that consumers have the ability to carryout their ATM financial transactions and/or banking functions at any time of the day and on any day of the week.

Existing ATMs are convenient and easy to use for most consumers. Existing ATMs typically provide instructions on an ATM display screen that are read by a user to provide for interactive operation of the ATM. Having read the display screen instructions, a user is able to use and operate the ATM via data and information entered on a keypad.

DRAWBACKS OF EXISTING SYSTEM & SOLUTION IN THE PROPOSED SYSTEM

1. **Drawback:** The user should carry their ATM card without fail. But in many cases we forget it.

Solution: So only we designed a system which helps us to use the ATM machine without the ATM card.

2. **Drawback:** The user must use separate ATM cards for different banking transactions.


Solution: But with our proposed system any bank transaction can possible only with one sim card.

3. **Drawback:** If PIN number is reviled then any one can do false transaction

Solution: But with our proposed system Web camera is used to capture the image of the person who uses the ATM machine. Web camera presented near the ATM machine will capture the user's image and compare it with the user image in the server using MATLAB. So secured transaction is possible.

4. **Drawback:** It may be difficult for blind people to use existing ATM

Solution: so we can add voice annunciator to indicate each and every process to the blind people. It enables a visually and/or hearing impaired individual to conveniently and easily carry out financial transactions or banking functions.

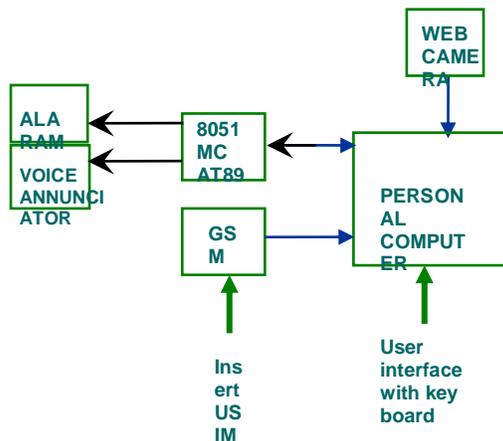

When USIM is inserted into the mobile scanning device it scans the USIM number through GSM Modem. Collected data is given to the equivalent Automated teller machines (ATMs) for further processing.

At the same time, web camera captures the image of the user and compares using digital signal processing with the image stored in the data base. When image matched then on the screen the following instruction will appear on the screen.

Enter PIN NO : Ex:2314

If PIN NO matched then the following instruction will appear on the screen.

Enter the name of the bank : Ex:SBI

Then the following instruction will appear on the screen.

Select the type of transaction:

Ex: withdraw, balance enquiry etc..

Each processing information produces by voice annunciation module with the help of microcontroller of AT89S52. It may be difficult for blind people to use existing ATM so we can add voice annunciator to indicate each and every process to the blind people. It enables a visually and/or hearing impaired individual to conveniently and easily carry out financial transactions or banking functions. Each processing information produces by voice annunciation module.

If images and PIN number are not same then micro controller AT89S52 gives alarm through Alert module. Data transfer unit consists of a micro controller of no AT89S52 which transfers the data between alert module, voice annunciation module & ATM machine.

CONCLUSIONS

This paper presents a system creates the new generation ATM machine which can be operator without the ATM card. By using this system ATM machine can be operator by using our SIM in the mobile phone. When we insert our SIM in the reader unit of the ATM machine it transfers the mobile to the server. In server we can collect the related information of the mobile number (i.e) the users account details, their photo etc. the camera presented near the ATM machine will capture the users image and compare it with the user image in the server.

Only when the image matches it asks the pin number and further processing starts. Otherwise the process is terminated. So by using this system need of ATM card is completely eliminated we can operate the ATM machine by using our SIM itself. By using this system malfunctions can be avoided. Our transaction will be much secured. One more application can also be added in this system for helping the blind people. In the existing system all the transactions are done through keyboard only. It may be difficult for blind people so we can also add voice enunciator to indicate each and very process to the blind people. It that enables a visually and/or hearing impaired individual to conveniently and easily carry out financial transactions or banking functions.

REFERENCES

- [1] Väikkynen, P. Korhonen, I., Plomp, J., Tuomisto, T., Cluitmans, L., Ailisto, H. and Seppä, H. “A user interaction paradigm for physical browsing and near-object control based on tags”: in *Proc. Physical Interaction Workshop on Real World User Interfaces*, (2003), 31-34. 821
- [2] Lauri Pohjanheimo, Heikki Keränen and Heikki Ailisto “Implementing TouchMe Paradigm with a Mobile Phone”, ACM International Conference Proceeding Series; Vol. 121.
- [3] Keränen, H., Pohjanheimo, L., Ailisto, H. (2005) Tag Manager: a Mobile Phone Platform for Physical Selection Services in International conference on Pervasive Services (ICPS 2005). Santorini, Greece. pp 405-412.
- [4] Synchronized Multimedia Integration Language (SMIL 2.0), W3C Recommendation 07 August 2001, <http://www.w3.org/TR/smil20/> .
- [5] Java 2 Platform, Micro Edition (J2ME). <http://java.sun.com/j2me/> .
- [6] M. Johns and G. Marsden “*Mobile Interaction Design*”, Wiley and Sons Ltd 2006, pg 178-182.
- [7] “Openwave Phone Simulator” http://developer.openwave.com/dvl/tools_and_sdk/phone_

[simulator/](#) .

[8] European ATM Security Team, “*European ATM Security Team*”, Diebold, Incorporated 2006, <http://www.diebold.com/rd/whitepapers/atmfraud&security.pdf>

[9] A. Jain, R. Bolle, and S. Pankati, “*Biometrics: personal identification in networked society*”, Kluwer Academic Publishers, 1998.